

DIGITUS[®] WALL MOUNT ENCLOSURE **600x450mm (WxD) / 600x560mm (WxD)**

Product Picture:



Example of Use:



the wall mount enclosures are available on request in black color RAL 9005

DIGITUS[®] WALL MOUNT ENCLOSURE 600x450mm (WxD) / 600x560mm (WxD)

Product Description:

The DIGITUS[®] wall mount enclosures are made of a robust steel sheet construction with a minimum of seams. The side sections are detachable and lockable. It is fast and easy to mount the enclosure. Separately there are leveling feets or castors available. Due to their flexibility the enclosures are ideal for all current IT- and Telecommunication applications.

Item Number Information – 600x450mm:

Article No	Description		
DN-19 07-U	DIGITUS [®] 7U Wall Mount Enclosure	402x600x450mm	color grey RAL 7035
DN-19 09-U	DIGITUS [®] 9U Wall Mount Enclosure	491x600x450mm	color grey RAL 7035
DN-19 12-U	DIGITUS [®] 12U Wall Mount Enclosure	624x600x450mm	color grey RAL 7035
DN-19 16-U	DIGITUS [®] 16U Wall Mount Enclosure	802x600x450mm	color grey RAL 7035
DN-19 20-U	DIGITUS [®] 20U Wall Mount Enclosure	980x600x450mm	color grey RAL 7035

Item Number Information – 600x560mm:

Article No	Description		
DN-19 07U-6/6	DIGITUS [®] 7U Wall Mount Enclosure	402x600x560mm	color grey RAL 7035
DN-19 09U-6/6	DIGITUS [®] 9U Wall Mount Enclosure	491x600x560mm	color grey RAL 7035
DN-19 12U-6/6	DIGITUS [®] 12U Wall Mount Enclosure	624x600x560mm	color grey RAL 7035
DN-19 16U-6/6	DIGITUS [®] 16U Wall Mount Enclosure	802x600x560mm	color grey RAL 7035
DN-19 20U-6/6	DIGITUS [®] 20U Wall Mount Enclosure	980x600x560mm	color grey RAL 7035

Product Details:

- 1.1 – 1.5mm strong sheet steel with high load capacity
- sheet steel powder coated
- side sections detachable and lockable
- ventilation slots for active and passive ventilation and exhaustion
- IP 40 rating
- Toughened safety glass door with steel frame, lockable
- 483mm (19") profile rails on the front side, adjustable in depth with Unit marking
- 483mm (19") profile rails on the back side, adjustable in depth *only for 560mm depth enclosures (DN-19 XX-U-6/6)
- cable entry on top with foam rubber and bottom with plastic coverage
- inclusive 8 pieces mounting screws
- color: light grey, RAL 7035
- inclusive 2 pieces of keys
- carrying capacity 100 kg

the wall mount enclosures are available on request in black color RAL 9005

DIGITUS[®] WALL MOUNT ENCLOSURE

600x450mm (WxD) / 600x560mm (WxD)

Standards:

- ISO 9001:2008 Quality Management System
- ISO 14001:2004 Environmental Management System
- 19" IEC 297-1 Mounting
- EN 61587-1 Mechanical Structures (Cabinets for Electronic equipment)

Equipment

Shelf (fixed):

DN-97609	DIGITUS [®] 1U Shelf	color grey RAL 7035	250x44mm (DxH)	15 kg loading capacity
DN-19 TRAY-1-SW	DIGITUS [®] 1U Shelf	color black RAL 9005	250x44mm (DxH)	15 kg loading capacity
DN-97614	DIGITUS [®] 1U Shelf	color grey RAL 7035	400x44mm (DxH)	15 kg loading capacity
DN-19 TRAY-1-400-SW	DIGITUS [®] 1U Shelf	color black RAL 9005	400x44mm (DxH)	15 kg loading capacity
DN-97610	DIGITUS [®] 2U Shelf	color grey RAL 7035	370x88mm (DxH)	20 kg loading capacity
DN-19 TRAY-2-SW	DIGITUS [®] 2U Shelf	color black RAL 9005	370x88mm (DxH)	20 kg loading capacity
DN-19 TRAY-2-55	DIGITUS [®] 2U Shelf	color grey RAL 7035	550x88mm (DxH)	20 kg loading capacity
DN-19 TRAY-2-55-SW	DIGITUS [®] 2U Shelf	color black RAL 9005	550x88mm (DxH)	20 kg loading capacity

Roof Cooling Unit:

DN-19 FAN-2-WM-T	Roof Cooling Unit, 2 Fans, with Switch inclusive Thermostat, color grey RAL 7035
DN-19 FAN-2-WM-T-SW	Roof Cooling Unit, 2 Fans, with Switch inclusive Thermostat, color black RAL 9005

Rack Mount Cooling Unit:

DN-19 FAN-2-HO	1U Rack Mount Cooling Unit, 2 Fans, with Switch incl. Thermostat, color grey RAL 7035
DN-19 FAN-2-HO-SW	1U Rack Mount Cooling Unit, 2 Fans, with Switch incl. Thermostat, color black RAL 9005
DN-19 FAN-4-HO	1U Rack Mount Cooling Unit, 4 Fans, with Switch incl. Thermostat, color grey RAL 7035
DN-19 FAN-4-HO-SW	1U Rack Mount Cooling Unit, 4 Fans, with Switch incl. Thermostat, color black RAL 9005

Substitute Fan:

DN-19 FAN	Fan for Roof Cooling Unit and Rack Mount Cooling Unit
-----------	---

Cable Management Panel:

DN-97601	1U Cable Management Panel, 5 pcs metal rings (40x60mm), color grey RAL 7035
DN-97602	1U Cable Management Panel, 5 pcs metal rings (40x60mm), color black RAL 9005
DN-19 ORG-2U	2U Cable Management Panel, 5 pcs metal rings (80x60mm), color grey RAL 7035
DN-19 ORG-2U-SW	2U Cable Management Panel, 5 pcs metal rings (80x60mm), color black RAL 9005

the wall mount enclosures are available on request in black color RAL 9005

DIGITUS[®] WALL MOUNT ENCLOSURE **600x450mm (WxD) / 600x560mm (WxD)**

Cable Management Rings:

DN-19 ORG-1	1U Cable Management Ring metal (44x60mm), Set 10 pcs, color grey RAL 7035
DN-19 ORG-1-SW	1U Cable Management Ring metal (44x60mm), Set 10 pcs, color black RAL 9005

Cable Put Through Panel:

DN-19 ORG-3U	1U Front Patch Cord Access Hole Panel with brush, color grey RAL 7035
DN-19 ORG-3U-SW	1U Front Patch Cord Access Hole Panel with brush, color black RAL 9005

Fixing Set:

DN-19 SET	Fixing Set, M6 screws, M6 nuts, M6 washer, 50 pcs, color black
DN-19 SET-S	Fixing Set, M6 screws, M6 nuts, M6 washer, 50 pcs, color silver

Potential Equalisation Panel:

DN-19 EARTH	Earthing Leads & potential, 6 Earthing leads with copper Busbar
-------------	---

Blank Panel:

DN-97612	1U Blank Panel, color grey RAL 7035
DN-19 BPN-01-SW	1U Blank Panel, color black RAL 9005
DN-97613	2U Blank Panel, color grey RAL 7035
DN-19 BPN-02-SW	2U Blank Panel, color black RAL 9005

Castor:

DN-19 CASTOR-WB	Castor Set, 4 pcs Castors, 2 Castors lockable
-----------------	---

Levelling Feet:

DN-19 FEET	Leveling Feet, 4 pcs
------------	----------------------

Lightning Fixture:



DN-19 LIGHT-2	1U Lightning Fixture LED, with door switch
---------------	--

PDU:

DN-95401	1U PDU, 8 x Schuko, 2 m connection cable with Schuko plug
DN-95402	1U PDU, 7 x Schuko, Switch, 2 m connection cable with Schuko plug
DN-95403	1U PDU, 7 x Schuko, Switch, Overload protection, 2 m connection cable with Schuko plug
DN-95407	1U PDU, 7 x Schuko, Switch, Overvoltage protection, 2 m connection cable with Schuko plug


the wall mount enclosures are available on request in black color RAL 9005

DIGITUS[®] WALL MOUNT ENCLOSURE 600x450mm (WxD) / 600x560mm (WxD)

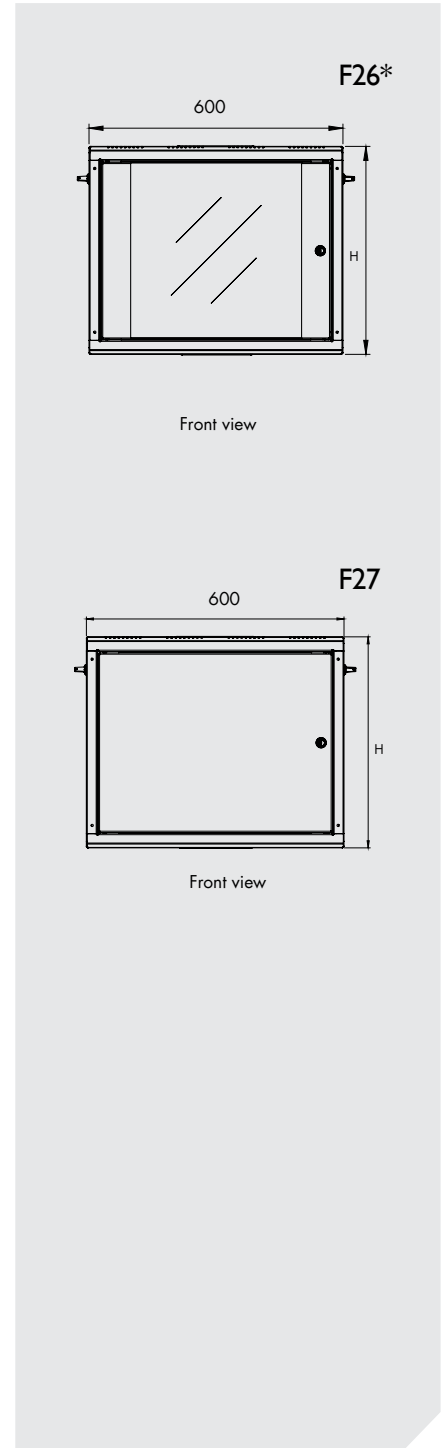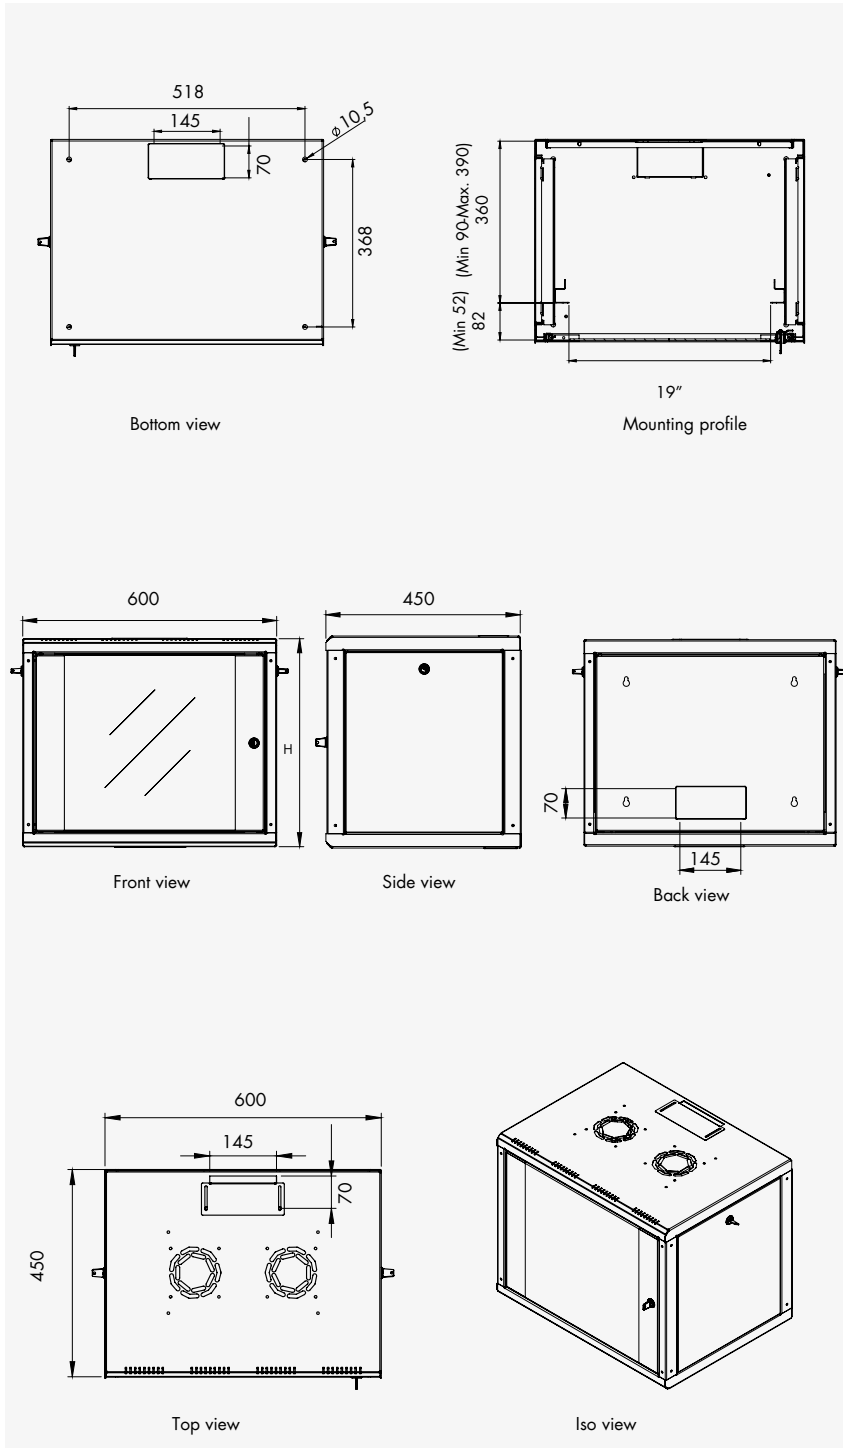

the wall mount enclosures are available on request in black color RAL 9005

DIGITUS® WALL MOUNT ENCLOSURE 600x450mm (WxD) / 600x560mm (WxD)

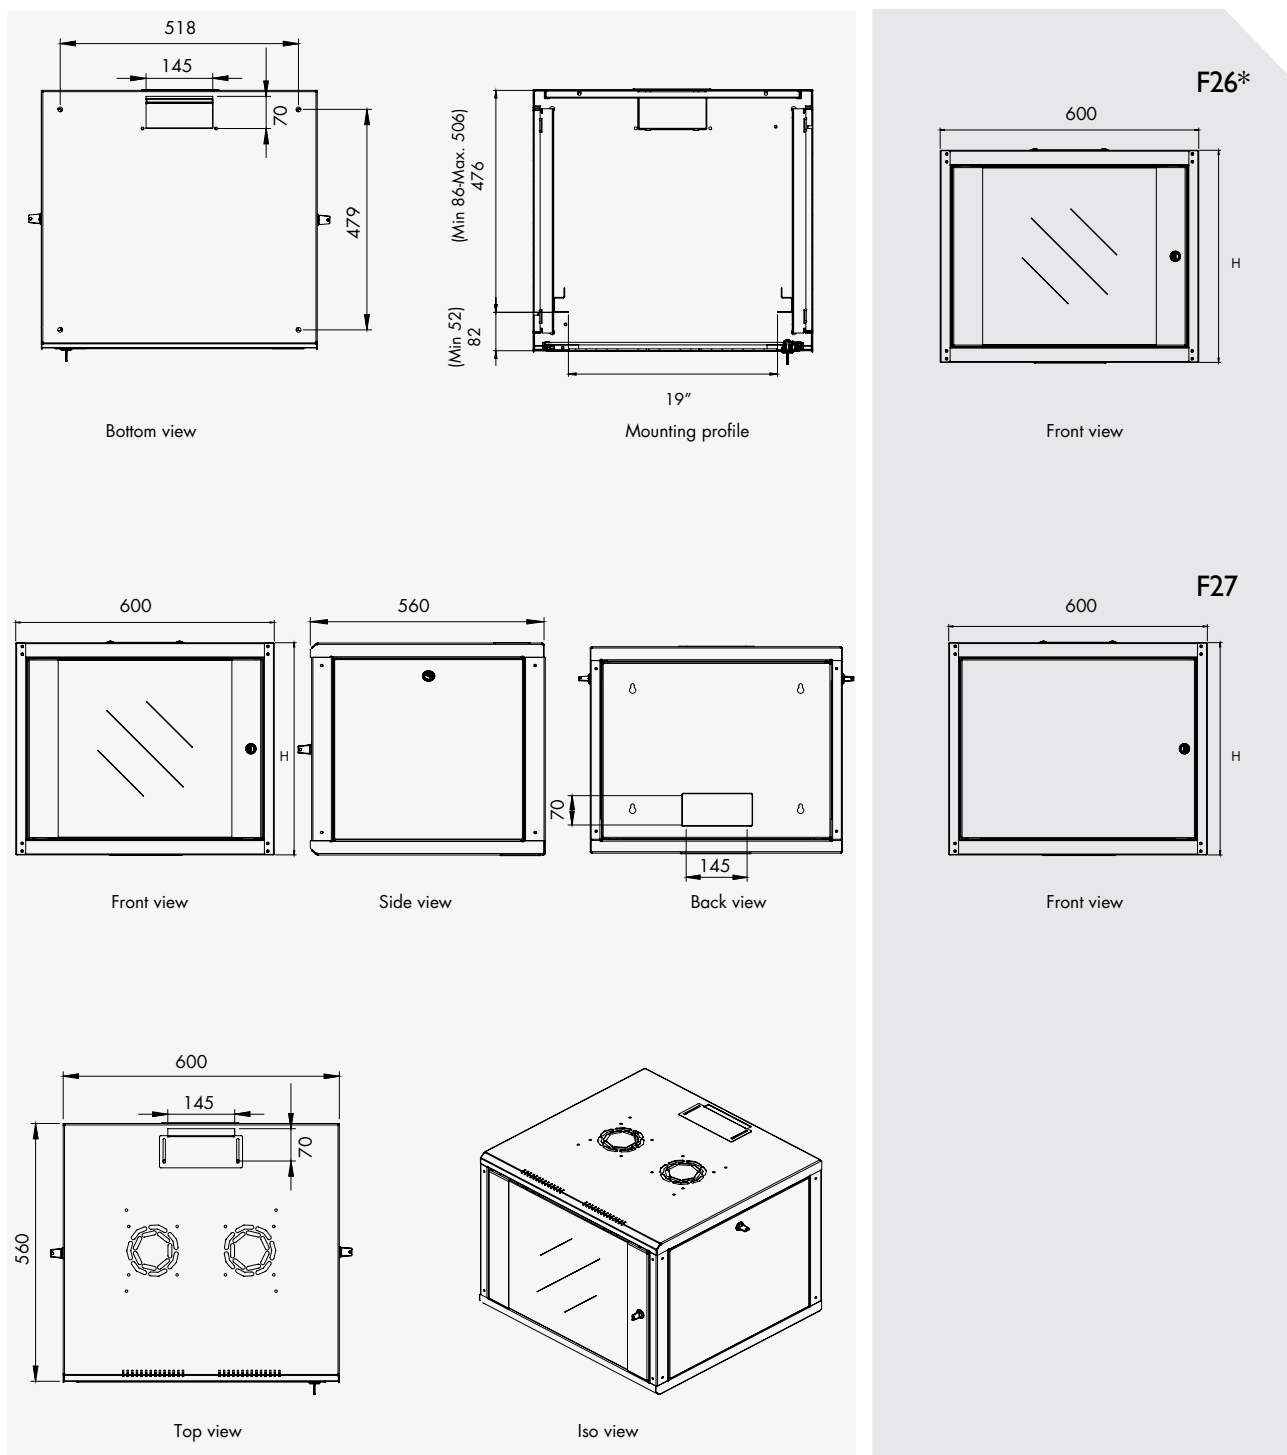

the wall mount enclosures are available on request in black color RAL 9005