

NVR SECURITY SYSTEM



Baby Care



Surveillance



Pet Monitoring



Elderly Care




1st scan to download app



2nd scan to connect NVR



3 Start remote view

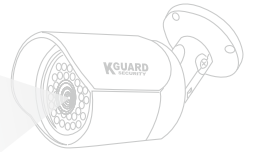

3 Simple Steps

START Remote View
on Smartphone or tablet in 3 mins



Plug-and-play
Automatically connect NVR and IP cameras without network setup



Cloud
Upload video/photo to Cloud at preset time interval or by motion detection



PoC
Supply power to IP cameras over standard Cat.5E or higher Ethernet cables (installation distance up to 60m), or supply through DC power (installation distance up to 500m)



Megapixel
High Definition Megapixel IP Cameras



HD recording
Record in High-Definition 1280 x 720 resolution



Push notification
Send push notifications to smartphone/tablet when events or intrusions are detected



Weatherproof
The supplied Ethernet cables incorporating with specialized connectors for providing a weatherproof connection



Audio
Integrated with Microphone for audio recording (ICB-100 only)





Cloud
Upload video/photo to Cloud at preset time interval or by motion detection

Push notification
Send push notifications to smartphone/tablet when events or intrusions are detected



Day & Night Surveillance IP Camera
Long range night vision (20m/30m) for Day & Night surveillance




NVR

- Cloud Storage
- Storage Mode
- Video Input
- Video Output
- Video Output Resolution
- Audio Output
- Video Compression
- Recording Resolution
- HDD Support
- KView Easy Connectivity
- Network Interface
- Network Protocol
- Browser Support
- IR Extender Port
- Sensor IN & Alarm Out Port
- Power Supply
- Operating Temp.(w/o HDD)
- Deimension (w/docking station)

- Dropbox / Google Drive
- Schedule / Motion Detection
- 4 LAN ports
- 1 VGA & 1 HDMI Outputs
- 1024x768, 1280x1024, 1440x900, 1280x720, 1920x1080
- Through HDMI Monitor/TV
- H.264
- 4 x 30fps @ 720p
- 1 SATA (up to 4TB)
- Yes, KViewQR
- 1 WAN port
- DHCP, PPPoE, Static IP
- IE 8.0 or above & Safari
- No
- No
- DC 15V
- 0°C to 55°C (32°F to 131°F)
- L193xW90xH208mm

PoC (Power over Cable)
Supply power to IP cameras over standard Cat.5E or higher Ethernet cables (installation distance up to 60m), or supply through DC power (installation distance up to 500m)

Weatherproof Connector
The included Ethernet cables incorporating with specialized connectors provide weatherproof connection for ICB-100/ICB-200. No tools required

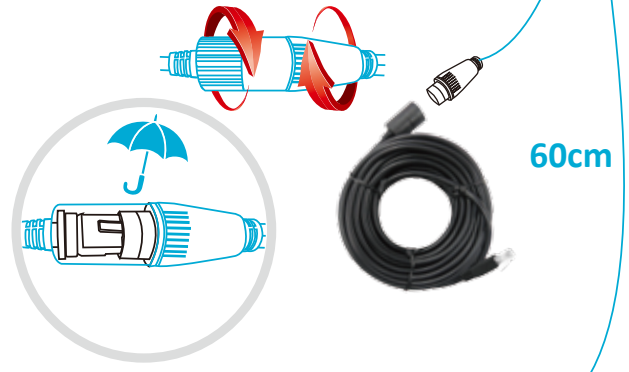

Microphone
Microphone for audio recording (ICB-100 only)




IP Camera

- Model Name
- Image Sensor
- Max. Resolution
- Lens
- Viewing Angle
- Night Vision
- Audio
- Power Socket
- Minimum Illumination
- Day / Night Mode
- Waterproof
- Operating Temperature
- Power Supply
- Dimensions
- Weight

- ICB-100 x 2 PCS, ICB-200 x 2 PCS
- 1/3" Mega Pixel CMOS Sensor with IR Cut Filter
- 1280(H) x 720(V)
- ICB-100: 3.6mm fixed, F1.2
- ICB-200: 6mm fixed, F1.2
- ICB-100: 75°, ICB-200: 45°
- ICB-100: 20m, ICB-200: 30m
- ICB-100: Yes, ICB-200: No
- Yes
- While Infrared LED on "0" lux
- Color during day / switches to B&W at night
- IP66
- 10 °C ~ 60 °C (14°F ~ 140°F)
- 12 VDC ± 10%, PoC
- 150x63x61mm
- 420g

Plug-and-play
Automatically connect NVR and IP cameras without network setup

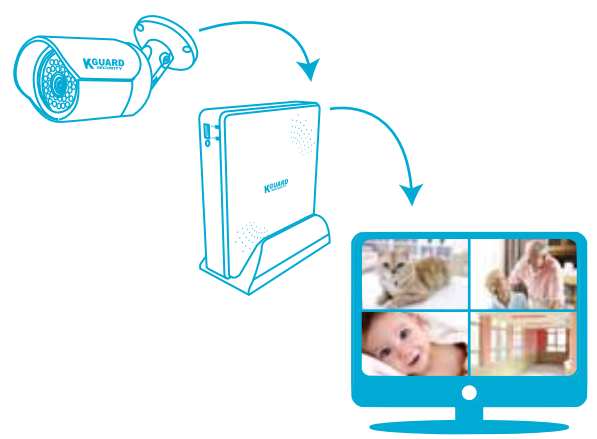

KGUARD INFORMATION CO., LTD. (Headquarters)
Address: 4F, No.113, Jian 2nd Rd., Jhonghe Dist., New Taipei City 23585 ,Taiwan (R.O.C.)
TEL: +886-2-8228-6080 / FAX: +886-2-8221-6857
Technical Support: support@kguardsecurity.com / Sales Inquiry: sales@kguardsecurity.com